

Yealink MSpeaker-II

Video Conferencing Soundbar
for Large Rooms



Crystal and Vivid Audio

화상회의 사운드바

화상회의를 위해 설계된 MSpeaker-II는 2개의 내장 스피커를 통해 최대 RMS 10W 사운드를 출력하여 대형 회의실을 커버할 수 있습니다.




Easy Deployment

PoE & Aux 연결


스타 캐스케이드 방식으로 PoE 허브와 연결하여 최대 4대까지 확장 구성이 가능하며, Yealink UVC 카메라와의 직접 연결도 가능합니다. 또한 3.5mm Aux 입력 단자로 범용 오디오 제품 연결도 지원합니다.

Installation


- Mount Horizontally on the Wall

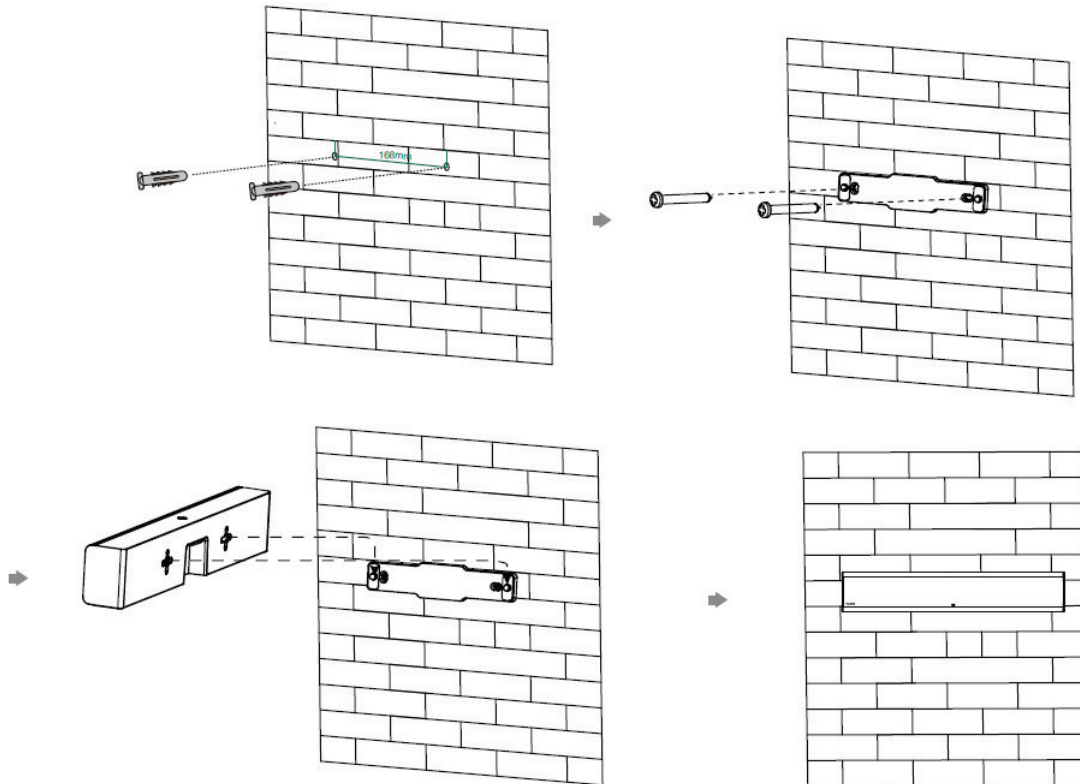

- Mount Vertically on the Wall

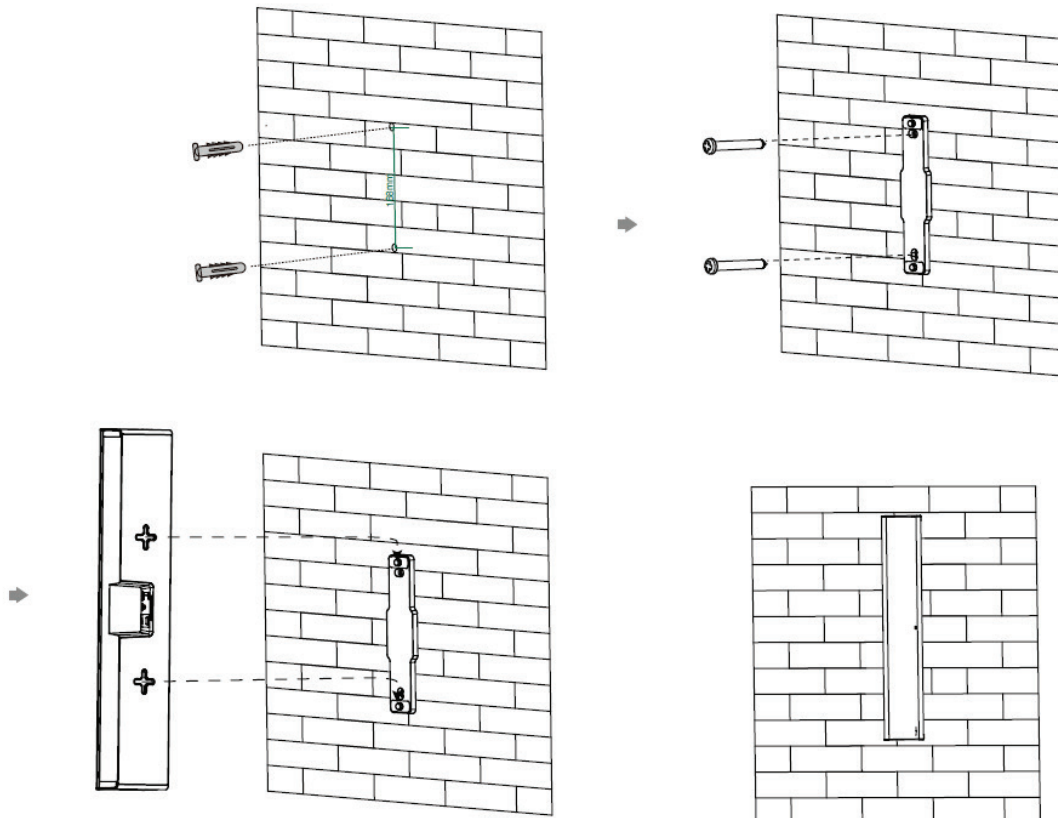

- Stick to the Table

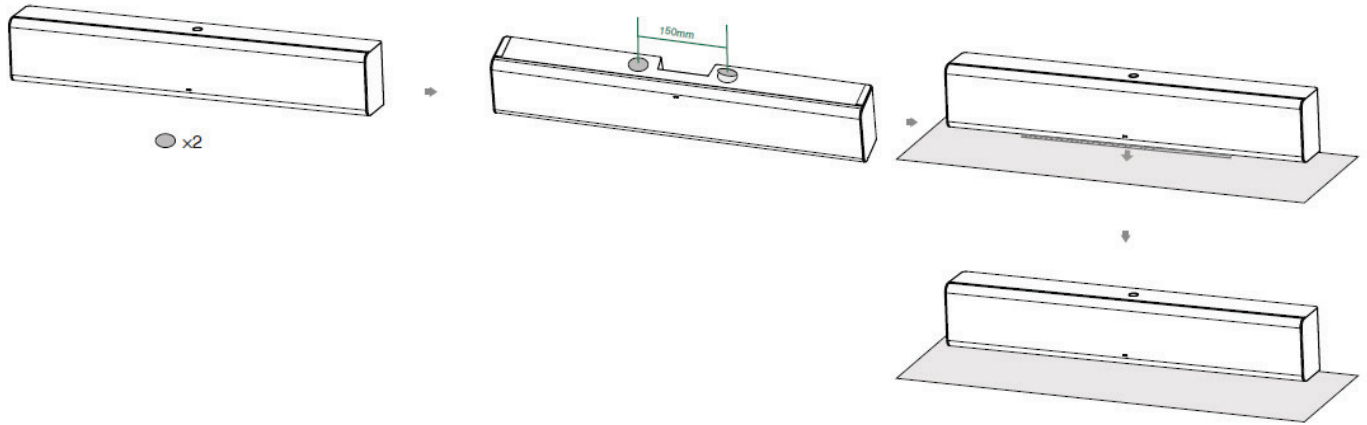

MSpeaker-II 사양표

Audio Output

- Stereo speakers
- Frequency respond: 100Hz-20KHz
- S/N: ≥ 70 dB
- RMS: 10W

Audio Input

- 1 x VCH (RJ45), supports PoE (802.3af)
- 1 x 3.5mm Line-in

Other Interfaces

- Built-in Bluetooth (for future use)
- Power Input:
 - DC 48V/0.7A
 - PSE 54V $\overline{\text{---}}$ 0.56A or PoE 48V $\overline{\text{---}}$ 0.27A

Physical Features

- Dimension (W.D.H): 500 mm x 60 mm x 86 mm
- Operating humidity: 5 - 90%
- Operating temperature: 0 - 40°C

Package Content

- MSpeaker-II
- Power Adapter
- 3 m audio cable (3.5 mm)
- Wall Mount Bracket
- Quick Start Guide